M5Q

instrument manifold (remote)

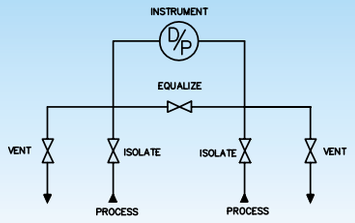

specifications

Five valve manifold M5Q is designed for complete isolation of instruments.

body	stainless steel
inlet (2x)	½" npt female at front side
outlet (2x)	½" npt female at back side
vent/test connection	at front side
equalizing bonnet (2x)	angular on top side
isolating bonnet (2x)	at left and right hand side
venting bonnet	angular on top side
stem	type HS, conical metal end tip with PTFE gland packing
pressure in bar	420

options:	stem type SO (max. pressure 400 bar) high temperature up to 550 °C high pressure up to 700 bar anti tamper facility with removable T-bar key

Detailed drawing available on request.

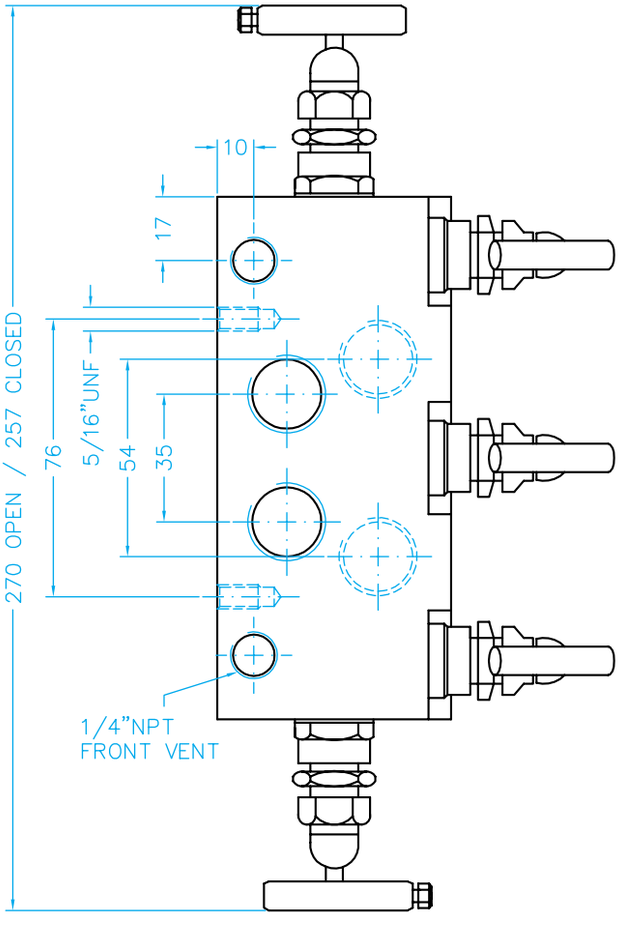

front view

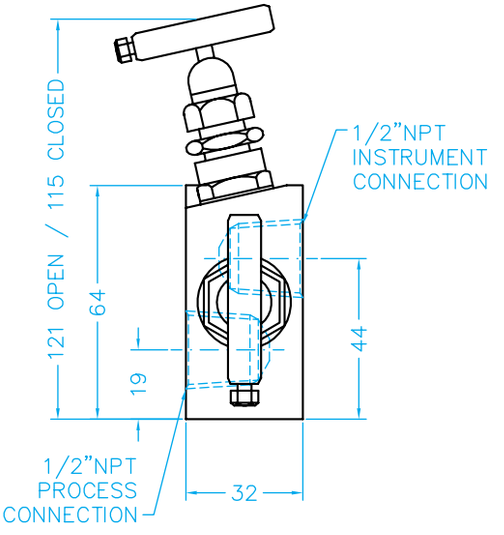

side view

type	in x out	thread type	body	stem	packing
M5Q	¼" x ¼" ⅜" x ⅜" ½" x ½"	npt bsp	Carbon steel AISI 304 AISI 316 AISI 316L Monel Hastelloy C	HS SO	PTFE glass filled PTFE grafoil