


M2R

instrument manifold (direct)

specifications


Two valve manifold M2R is especially designed to accommodate threaded direct transmitters and pressure instruments.



body	stainless steel
inlet (1x)	at front side
outlet (1x)	at top side
vent/test connection	at front side
venting bonnet	at left hand side
isolating bonnet	at right hand side
stem	type HS, conical metal end tip with PTFE gland packing
pressure in bar	420

options:	stem type SO (max. pressure 400 bar) high temperature up to 550 °C high pressure up to 700 bar anti tamper facility with removable T-bar key
----------	---

Detailed drawing available on request.

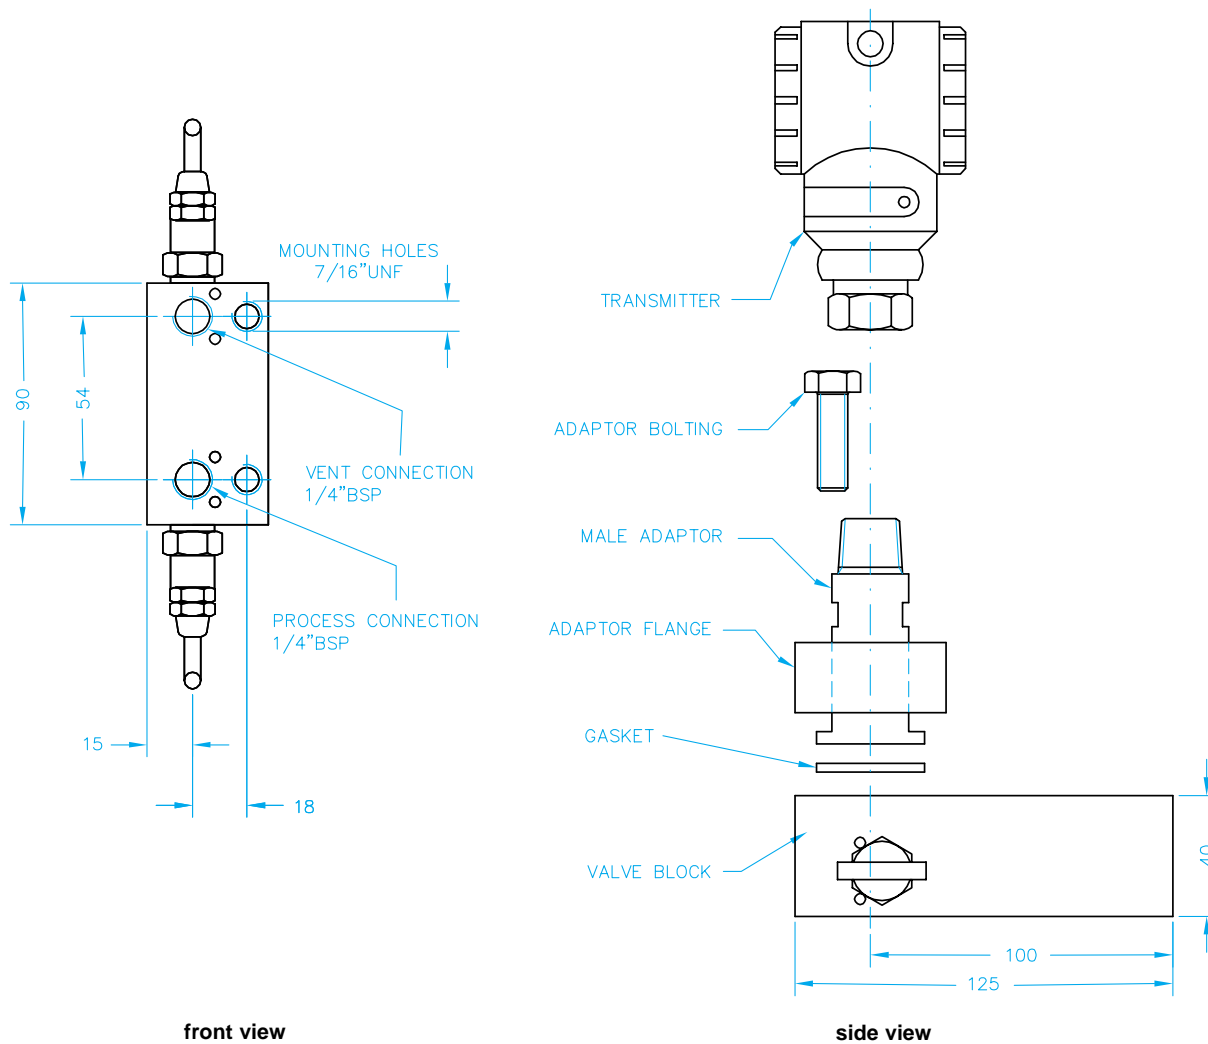

type	in x out	thread type	body	stem	packing
M2R	1/4" x 1/2" 1/2" x 1/2"	npt bsp	AISI 316 Monel	HS SO	PTFE glass filled PTFE grafoil